

Wilo MC Wilo MP
Horizontal Multistage Pumps

Product Brochure



Wilo MC Wilo MP

Horizontal Multistage Pumps


Applications Include:

- » Water Supply
- » Water Treatment
- » Fire Protection
- » Pressure Boosting
- » Irrigation
- » Industrial Washing


WILO MC WILO MP



Wilo MC
Self-Priming

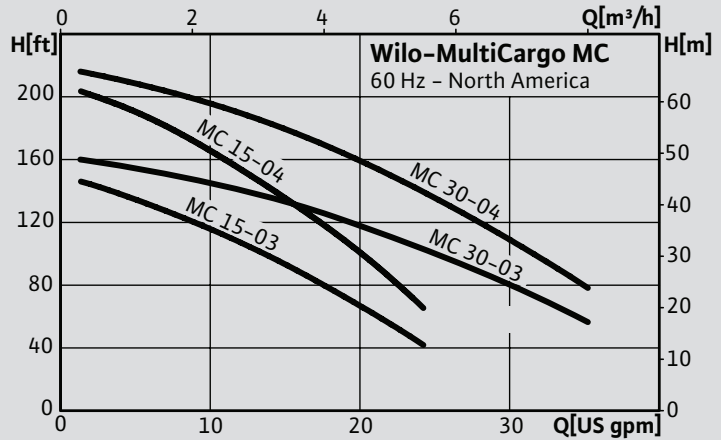

Wilo MP
Non Self-Priming

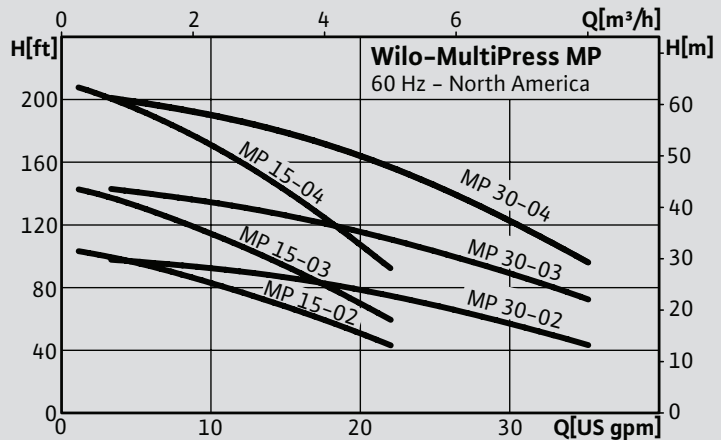

- » Available in ¾ to 2 hp.
- » Max head 210' (90 PSI boost pressure)
- » Max flow 38 USGPM
- » Low-noise TEFC motor (<55 dB)
- » High self-priming capability (<2min)
- » 304 SS Construction for excellent abrasion resistance
- » Cr/C mechanical seal
- » Fluid temperature range from 40°F to 95°F (5°C to 35°C)



WILO USA LLC

Toll-Free: 866-945-6872
 Web: www.wilo-usa.com
 Email: info@wilo-usa.com

